


BID Chip Reset Trinity F90+


1. Connect the charger to the power plug
2. Press Star/ENT Button and turn on the charger
3. Blank screen appears
4. Start MP-100125-01 E7 V1.10.exe file
5. Connect the computer via Mini USB Port



6. The charger will connect to the computer (see Picture)

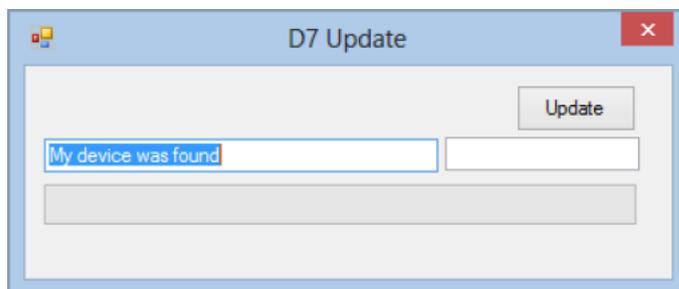


7. Press "Update" and wait until update procedure is completed

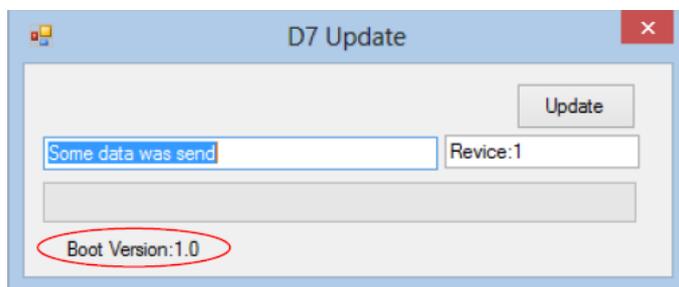


8. The charger will restart automatically
9. Close the MP-100125-01 E7 V1.10.exe
10. Disconnect the USB connection between the charger and your computer.
11. Connect the battery to the charger

12. Press the Stop/ESC Button to enter the BID Edit Screen

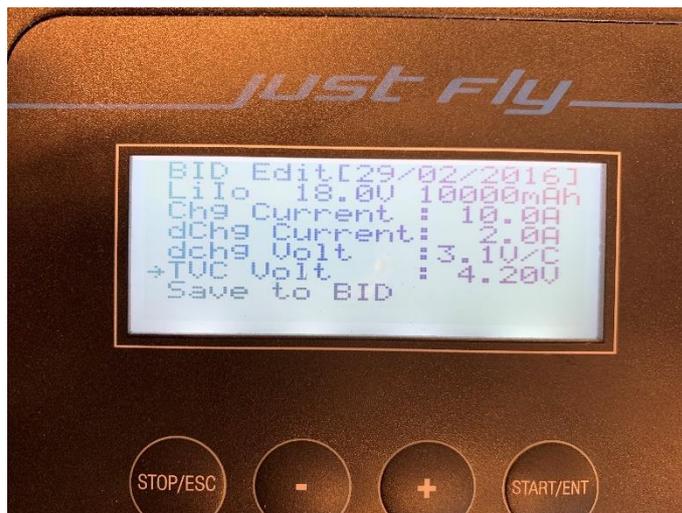

13. Navigate through this Screen with +, -, Start/ENT and Stop/ESC Buttons

14. Change the settings to the settings shown in the picture below

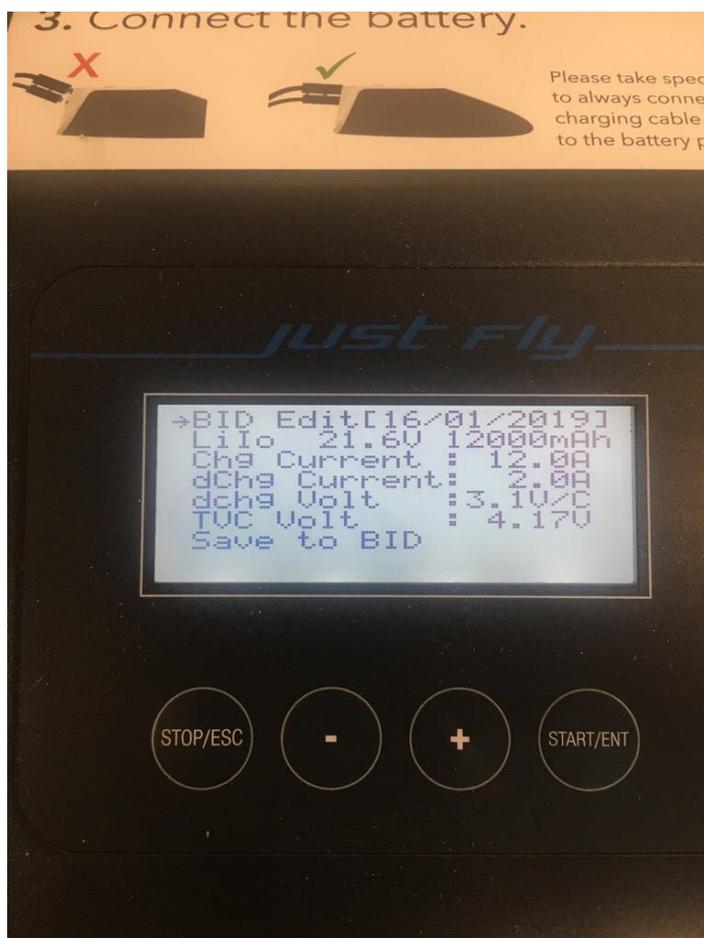

15. After changing the settings navigate to "Save to BID" and press Start/ENT

16. Charger will beep, if not, repeat the procedure from step 9


17. Disconnect the battery.

18. Turn off the charger.

19. Turn on the charger

20. Connect the battery.

21. Please confirm that the displayed settings are as shown below:

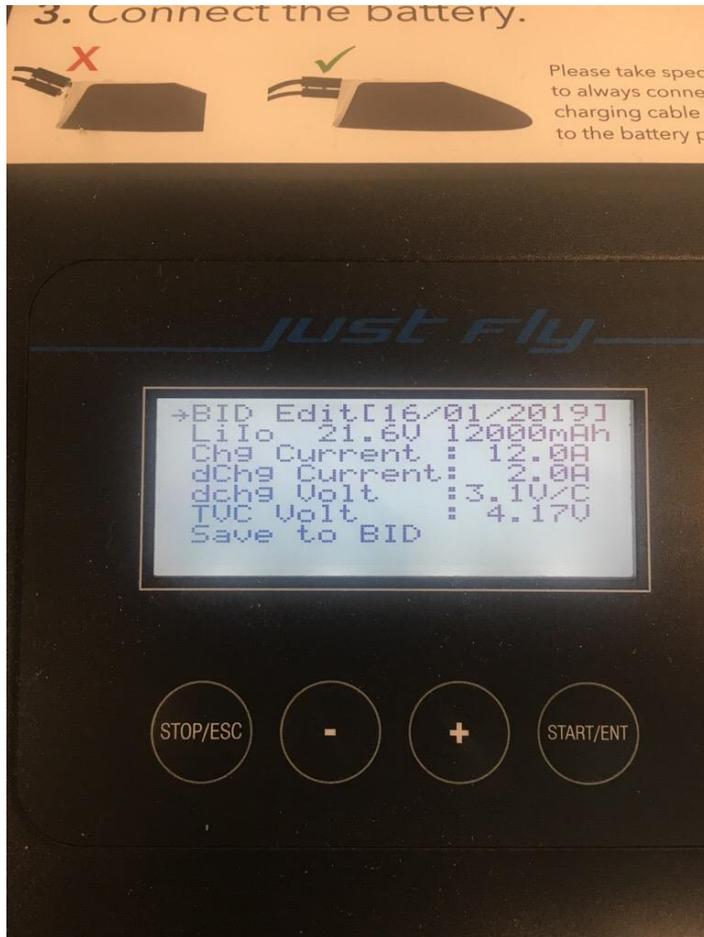

22. If the settings are identical to the ones shown above please disconnect the battery and turn off the charger.


23. Press Star/ENT Button and turn on the charger

24. Blank screen appears


25. Start E7-V204_707.exe

26. Connect the charger to your computer via Mini USB Port

27. The charger will connect to the computer (see Picture)

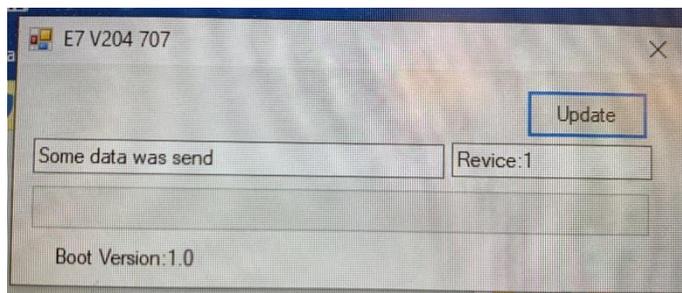

28. Press the Update Button and wait until update procedure is completed

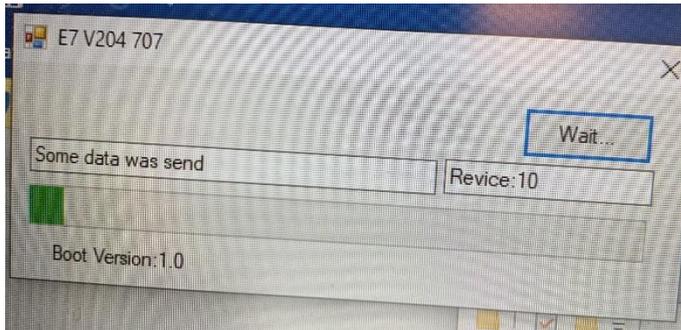

29. Charger will restart now
30. Disconnect the USB Port
31. Connect the battery to the charger
32. Charger should show the BID Chip Settings like shown in the picture below

